

**TPT52L**

Ticket dispenser with high resolution thermal technology. Suitable for applications in parking, queue management systems, gaming and self-service machines, info and multimedia kiosks. High printing speed > 130mm/sec. Paper width 60mm. Paper roll diameter max. 100mm. Friendly use and easy paper loading. Automatic cutter on board. Serial RS232 and parallel interfaces. Sensors: paper end, head open, head temperature, near paper end (optional). Double colour thermal printing. Most common barcode printing: UPC-A, UPC-E, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128 e CODE32.


**TPL80/82.5**

Affordable and reliable thermal ticket printer, paper width 80/82.5mm, high printing speed 140mm/sec with anti-jamming and near paper end sensors; Serial/ USB/ Centronics interfaces. 180 mm roll dimension. Paper roll support included.

**Status Monitor:** additional printing driver component that gives remote visibility of paper and printer status, jams, near-end of paper and end of paper status and information on the number of tickets or prints. The software can even be set to send email alerts or SMS, making easier remote maintenance operations.



Status Monitor

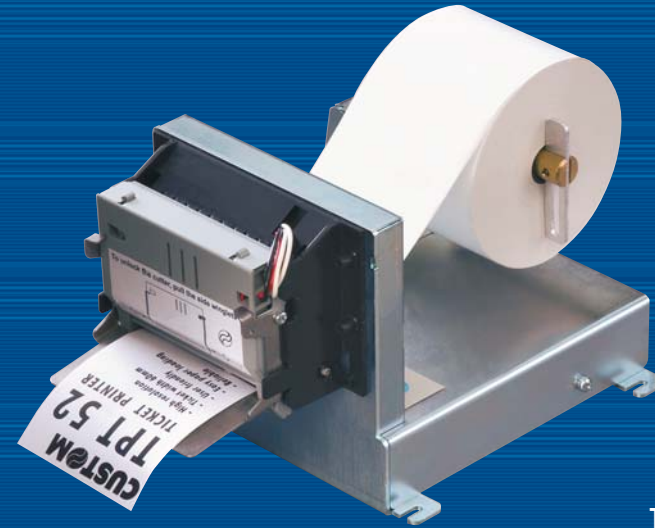

TPT52L - 60mm

**TPT52L/TPL80/82.5**

- Compact
- Affordable
- High Reliability
- User Friendly



	TPT52L	TPL80/82.5
<b>Printing method</b>	Thermal fixed head	
<b>Resolution</b>	203 dpi (8 dots/mm)	
<b>Printing speed</b>	>130 mm/sec	>140mm/sec
<b>Paper width</b>	60 mm	80/82.5mm
<b>Roll dimension</b>	max 100mm	max 180mm
<b>Print direction</b>	Straight, 180°	Straight, 90°, 180°, 360°
<b>Type styles</b>	Normal double or quadruple height and width, reverse, underscored, italic, bold	Height/width from 1 to 8, bold, reverse, underscored, italic
<b>Character sets</b>	ASCII standard, International	
<b>Emulation</b>	CUSTOM/POS	
<b>Interfaces</b>	RS232, Centronics	RS232, USB, Centronics
<b>Data buffer</b>	8 Kb	16 Kb
<b>Flash memory</b>	256 Kb	
<b>Graphics memory</b>	3 logos of 32kb	6 logos 608 x 215
<b>Drivers</b>	Win 2K, XP; Linux	
<b>Software tools</b>	Font Editor; Logo Editor	
<b>Hardware options</b>	Near paper end sensor	
<b>Power supply</b>	24 Vdc ± 10%	
<b>Power consumption*</b>	1A	2.5A
<b>Head life</b>	50 Km / 100M pulses	
<b>MTBF**</b>	300.000 hours	435.000 hours
<b>Dimension (mm)</b>	211x114(h)x143	213x144(h)x148
<b>Weight</b>	1,5 Kg	2,3 Kg



\*average (50% dots on)

\*\*electronic board